

Application

Busbar of pin and fork type ensures reliable and efficient terminal connection to MCB, RCCB and other modular electric devices.

Construction and Feature

- Standard segmented connecting pin saves labour tremendously
- High purified copper used to ensure perfect electricity conductivity
- Fire resistant material endures abnormal heating

Technical Data

- Busbar 1P+N
 - Shape: pin type
 - Rated current: 32A
 - Rated insulating voltage: 500V AC
 - Flammability of plastic part : class 1


- Busbar 1P, 2P, 3P, 4P
 - Shape: pin type, fork type
 - Rated current: 63, 125A
 - Rated insulating voltage: 500V AC
 - Flammability of plastic part: class 1

- End Cap
 - Adaptable to full range busbars
 - Used to insulate the exposed living parts at both ends of busbar

- Terminal Adaptor
 - Applicable to busbar for terminal connection
 - Fixed on busbar insulating part to secure high reliability
 - Connection capacity: 25mm²


G

Copper Busbar

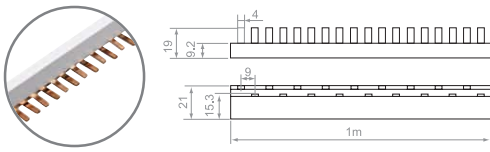


Busbar 1P+N

Category	Rated current	Terminals	Length
BP032/1N	32A	56	1m

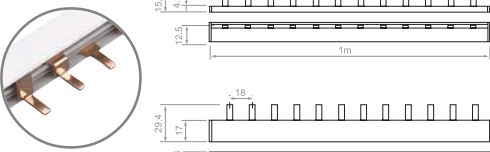


Busbar pin type 1P, 2P, 3P, 4P

Category	Rated current	Terminals	Length
BP063/1	63A	56(55)	1m
BP063/2	63A	27	1m
BP063/3	63A	18	1m
BP063/4	63A	14	1m
BP125/1	125A	56(55)	1m
BP125/2	125A	27	1m
BP125/3	125A	18	1m
BP125/4	125A	14	1m

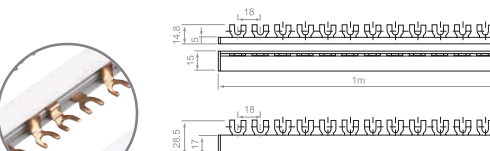

Busbar fork type 1P, 2P, 3P, 4P

Category	Rated current	Terminals	Length
BF063/1	63A	56(55)	1m
BF063/2	63A	27	1m
BF063/3	63A	18	1m
BF063/4	63A	14	1m

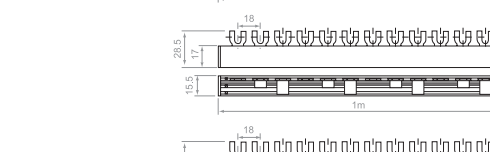

End Cap



Terminal Adaptor

