






A Lock Nut B Washer C Body D Seal E Sealing Nut



PG Type Nylon Cable Glands

- Material: PA (NYLON), UL 94
- Hermetic seal: NBR, EPDM
- Working temperature: -40°C to 100°C in static state, short term up to 120°C
-20°C to 80°C in dynamic state, short term up to 120°C
- Degree of Protection: IP68 (under the situation: the wire/cable is in clamping range, besides, the O loop has been assembled)
- Color: Grey, Black, other colors customized.

Thread	Ø mm	GL mm	H mm	U mm	AG mm
PG 7	3-6.5	8	22	16	12.5
PG 9	4-8	8.2	24	19	15.2
PG 11	5-10	8.6	26	22	18.6
PG 13.5	6.7-12	9	27	24	20.4
PG 16	10.2-14	10	29	27	22.5
PG 21	13-18	10	35	33	28.3
PG 29	18.5-25	12	40	42	37
PG 36	23-32	14	48	53	47
PG 42	32.7-38	14	50	60	54
PG 48	37-44	16.6	51	65	59.3

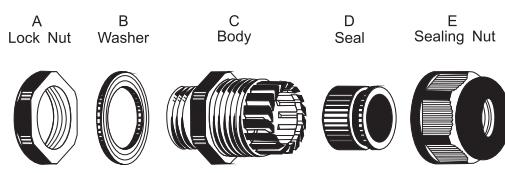

M Type Nylon Cable Glands

- Material: PA (NYLON), UL 94
- Hermetic seal: NBR, EPDM
- Working temperature: -40°C to 100°C in static state, short term up to 120°C
-20°C to 80°C in dynamic state, short term up to 120°C
- Degree of Protection: IP68 (under the situation: the wire/cable is in clamping range, besides, the O loop has been assembled)
- Color: Grey, Black, other colors customized.

Thread	Ø mm	GL mm	H mm	U mm	AG mm
M 12 x 1.5	3-6.5	8	22	15	12
M 16 x 1.5	4-8	8.2	24	19	16
M 20 x 1.5	6.7-12	9	27	24	20
M 25 x 1.5	13-18	10	35	33	25
M 32 x 1.5	18.5-25	12	40	42	32
M 40 x 1.5	23-32	14	48	53	40
M 50 x 1.5	32.7-38	14	50	60	50
M 63 x 1.5	37-44	16.6	51	65/68	63